

# FAST SWEEPING METHODS FOR STATIC HAMILTON-JACOBI EQUATIONS

CHIU YEN KAO, STANLEY OSHER, AND YEN-HSI TSAI

ABSTRACT. We propose a new sweeping algorithm which discretizes the Legendre transform of the numerical Hamiltonian using an explicit formula. This formula yields solution on a grid point using only values of the immediate neighboring grid values and is easy to implement numerically. The minimization that is related to the Legendre transform in our sweeping scheme can either be solved analytically or numerically. We illustrate the efficiency and accuracy approach with several numerical examples in 2D and 3D.

## 1. INTRODUCTION

Hamilton-Jacobi equations

$$(1) \quad \psi_t(x, t) + H(x, \nabla\psi(x, t)) = 0$$

arise in many applications ranging from classical mechanics to contemporary problems of optimal control. These include: geometrical optics, crystal growth, etching, computer vision, obstacle navigation, path planning, photolithography, and seismology. In general, these nonlinear partial differential equations can not be solved analytically. The solutions usually develop singularities in their derivatives even with smooth initial conditions. In these cases, the solutions do not satisfy the equation in the classical sense. The kind of weak solution that is commonly sought after is called the viscosity solution [8]. Numerically, in general, one looks for a consistent and monotone scheme to construct approximate viscosity solutions [24].

In this paper, we focus on static Hamilton-Jacobi equations of the following form:

$$(2) \quad \begin{cases} H(x, \nabla\phi(x)) = R(x) & x \in \Omega \\ \phi(x) = q(x) & x \in \Gamma \subset \partial\Omega \end{cases}$$

where  $H$ ,  $q$ , and  $R > 0$  are Lipschitz continuous, and  $H$  is also convex and homogeneous of degree one in  $\nabla\phi(x)$ . A special case of this type of equations is the eikonal equation:

$$(3) \quad \|\nabla\phi\| = r(x)$$

with the same type of Dirichlet boundary condition as in (2). Many numerical methods have been developed for this problem. Rouy and Tourin [21] used an iterative method to solve the discretized eikonal equation and proved that it converges to the viscosity solution. The key is to use an upwind, monotone, and consistent discretization for  $\|\nabla\phi\|$ . Instead of using iterative methods, Tsitsiklis [26], later Sethian [22] and Helmsen et. al. [11] proposed single-pass methods. Based on the monotonicity of the solution along the characteristics, they combined the heap-sort data structure with a variation of the classical

---

DEPARTMENT OF MATHEMATICS, UNIVERSITY OF CALIFORNIA LOS ANGELES, LOS ANGELES, CALIFORNIA 90095, EMAIL:CKAO@MATH.UCLA.EDU

DEPARTMENT OF MATHEMATICS, UNIVERSITY OF CALIFORNIA LOS ANGELES, LOS ANGELES, CALIFORNIA 90095, EMAIL:SJO@MATH.UCLA.EDU

DEPARTMENT OF MATHEMATICS AND PACM, PRINCETON UNIVERSITY, NEW JERSEY 08544, EMAIL:Y TSAI@MATH.PRINCETON.EDU

Dijkstra algorithm to solve the steady state equation  $\|\nabla\phi\| = r(\mathbf{x})$ . This became known as the fast marching method whose complexity is  $O(N \log N)$ , where  $N$  is the total number of grid points in the domain. Later Sethian and Vladimirsky [23] generalize the method of [26] to solve (2).

Osher [15] provided a link between time independent and time dependent Hamilton-Jacobi equations. The zero level set of the viscosity solution  $\psi$  of (1) with suitable initial conditions at various time  $t$  is the solution  $\phi(x, y) = t$  of (2). This gives another approach that one can try to solve the time-dependent equation by the level set formulation [17] with high order approximations on the partial derivatives [16] [12].

Another approach to obtaining a “time” dependent Hamilton-Jacobi equation from a time independent Hamilton-Jacobi equation is using so-called paraxial formulation by assuming that there is a preferred direction in the wave propagation. In [10], the paraxial formulation was first proposed for the eikonal equation (3). Later in [19][20], a paraxial formulation was proposed for the static general eikonal equation (2) in the geophysical applications.

An important application for (2) is the geodesic distance on a manifold. Suppose that  $P = (x, y)$  is a point on the manifold  $M$  defined as the graph of a smooth function  $f(x, y)$  and  $\gamma$  are the curves connecting  $P$  and  $\Gamma \subset M$  on the manifold. The minimizing curve of  $\gamma$  is called the geodesic. Let  $\phi$  be the distance function such that

$$\phi(x, y) = \min_{\gamma \subset M} \int_{\gamma} ds$$

Then  $\phi$  is the solution of

$$(4) \quad \sqrt{\left(\frac{1+f_y^2}{f_x^2+f_y^2+1}\right)\phi_x^2 + \left(\frac{1+f_x^2}{f_x^2+f_y^2+1}\right)\phi_y^2 - 2\frac{f_x f_y}{f_x^2+f_y^2+1}\phi_x\phi_y} = 1, \quad \phi|_{\Gamma} = 0$$

This equation can be easily generalized for the higher dimensional cases. For example, in 3 dimensional case we also write down the formula for  $M$  as the graph of a smooth function  $f(x, y, z)$ . The distance function  $\phi$  satisfies

$$(5) \quad \sqrt{a\phi_x^2 + b\phi_y^2 + c\phi_z^2 - 2d\phi_x\phi_y - 2e\phi_y\phi_z - 2f\phi_z\phi_x} = 1, \quad \phi|_{\Gamma} = 0$$

where

$$a = \frac{1+f_y^2+f_z^2}{1+f_x^2+f_y^2+f_z^2}, \quad b = \frac{1+f_x^2+f_z^2}{1+f_x^2+f_y^2+f_z^2}, \quad c = \frac{1+f_x^2+f_y^2}{1+f_x^2+f_y^2+f_z^2},$$

$$d = \frac{f_x f_y}{1+f_x^2+f_y^2+f_z^2}, \quad e = \frac{f_y f_z}{1+f_x^2+f_y^2+f_z^2}, \quad \text{and } f = \frac{f_x f_z}{1+f_x^2+f_y^2+f_z^2}.$$

We will apply our new algorithm to compute the geodesic distance later. There are other approaches that are designed to compute geodesic distances on manifolds. Kimmel and Sethian [13] extended the fast marching method to triangulated manifolds and provided an algorithm for computing the geodesic distances and thereby extracting shortest paths on triangulated manifolds. Barth [2] used the discontinuous Galerkin method to find the distance on graphs of functions that are represented by spline functions. In [6], the authors embed the manifold as the zero level set of a Lipschitz continuous function and solve the corresponding eikonal equation (4) in the embedding space. In [14] the authors based their work on the theory of geodesics on Riemannian manifolds with boundaries and adapted the standard fast marching method to compute weighted distance functions and geodesics on implicit surfaces efficiently. Tsai et. al. [25] used a fast Gauss-Seidel type iteration method and a monotone upwind Godunov flux for the numerical Hamiltonian.

We propose a new interpretation of the monotone upwind Godunov flux for the numerical Hamiltonian to solve (2). The complexity of our method is  $O(N)$ . We illustrate the approach with several numerical examples in 2D and 3D.

## 2. A NEW NUMERICAL SCHEME FOR CONVEX HAMILTONIANS

Our new numerical algorithm for static Hamilton Jacobi equations is composed of a sweeping process and an update formula. The sweeping process we use here is a version of Gauss-Seidel iteration. It is motivated originally by Boué and Dupuis [3], who suggested that the complexity of this approach for the eikonal case is  $O(N)$ . We sweep through the grids with alternating directions in order to follow the characteristics and use the most recent values as we update the solution. This means that we overwrite an old value with its new value as soon as we get it. In one dimension, we sweep through the grids from left to right followed by right to left because the characteristics only have two possible directions. In two dimension, the characteristics may have an infinite number of possible directions. We use four sweeping directions so that a specific sweeping direction covers a group of characteristics at the same time. We denote these four sweeping directions as one iteration. In  $n$  dimension, we will use  $2^n$  alternating directions in one iteration. We stop our iterations when the  $L_1$  – norm of the difference of two successive iteration results is less than the given tolerance, which is  $O(h)$ , where  $h$  is the grid size.

The new update formula we derive here comes from the idea of the Legendre transformation. The Legendre transformation can be applied to the Wulff problem [18] which is used to determine the equilibrium shape of crystalline materials. We give the definitions in the following.

**Definition 1.** Let  $\gamma : S^{d-1} \rightarrow R^+$  be a continuous function defined on a curved space  $S^{d-1}$ .

1. The first Legendre transformation of  $\gamma$  is:

$$\gamma_*(\nu) = \min_{\theta \cdot \nu > 0, |\theta|=1} \left[ \frac{\gamma(\theta)}{(\theta \cdot \nu)} \right]$$

2. The second Legendre transformation of  $\gamma$  is:

$$\gamma^*(\nu) = \max_{\theta \cdot \nu > 0, |\theta|=1} [\gamma(\theta)(\theta \cdot \nu)]$$

The first and second Legendre transformation are dual to each other in certain sense, i.e.  $(r_*)^* = r$  if  $r$  is convex and  $(r^*)_* = r$  if  $r$  is polar-convex. See e.g. [18]. We can extend  $\gamma$  to the whole space  $R^d$  by defining

$$\tilde{\gamma}(x) = |x| \gamma\left(\frac{x}{|x|}\right)$$

where the extension  $\tilde{\gamma}$  is homogeneous of degree 1 and  $x \in R^d$ .

The convex Hamiltonian using the Bellman formula or the Legendre transformation is:

$$H(\nabla \phi(x)) = \max_{\theta} [(\nabla \phi \cdot \theta)w(\theta)], \quad \theta \in S^{d-1}$$

where

$$w(\theta) = \min_{\nu \cdot \theta > 0, |\nu|=1} \left[ \frac{H(\nu)}{(\nu \cdot \theta)} \right] \quad \text{and} \quad \nu = \frac{\nabla \phi(x)}{|\nabla \phi(x)|}$$

We define the numerical Hamiltonian as follows:

$$\hat{H}(D_-^i \phi; D_+^j \phi) = \max_{\theta} \left\{ \left( \sum_k D_{\mp}^k \phi \cdot \theta_k^{\pm} \right) w(\theta) \right\}$$

where  $D_-^i \phi$  ( $D_+^j \phi$ ) are backward (forward) difference in  $i$  ( $j$ ) direction,  $\theta^+ = \max(\theta, 0)$ , and  $\theta^- = \min(\theta, 0)$ . This numerical Hamiltonian is monotone and consistent. It also turns out to be Godunov's numerical Hamiltonian. In order to describe this clearly without loss of generality, we discuss the 2-dimensional case here.

$$H(\phi_x, \phi_y) = \max_{\theta} (\phi_x \cos \theta + \phi_y \sin \theta) w(\theta),$$

where

$$w(\theta) = \min_{-\frac{\pi}{2} \leq \nu - \theta \leq \frac{\pi}{2}} \frac{H(\cos \nu, \sin \nu)}{\cos(\nu - \theta)}$$

The new numerical Hamiltonian is

$$\hat{H}(D_-^x \phi, D_+^x \phi; D_-^y \phi, D_+^y \phi) = \max_{\theta} \{ (\cos \theta^{\pm} D_{\mp}^x \phi + \sin \theta^{\pm} D_{\mp}^y \phi) w(\theta) \}$$

We say a function  $H(x_1, x_2, \dots, x_n)$  is non-decreasing in  $x_j$  by writing  $H(x_1, x_2, \dots, x_{j-1}, \uparrow, x_{j+1}, \dots, x_n)$  and non-increasing by writing  $H(x_1, x_2, \dots, x_{j-1}, \downarrow, x_{j+1}, \dots, x_n)$ .

**Lemma 1.**  $\hat{H}$  is monotone; i.e.  $\hat{H}(\uparrow, \downarrow, \uparrow, \downarrow)$ .

*Proof.* Since  $w > 0$ , this conclusion is straightforward. □

**Lemma 2.**  $\hat{H}$  is consistent; i.e.  $\hat{H}(p, p; q, q) = H(p, q)$ .

*Proof.* This is a simple manipulation of the definitions:

$$\begin{aligned} \hat{H}(p_-, p_+; q_-, q_+) &:= \max_{\theta} \{ (\cos \theta^{\pm} p_{\mp} + \sin \theta^{\pm} q_{\mp}) w(\theta) \} \\ \hat{H}(p, p; q, q) &= \max_{\theta} \{ (\cos \theta^{\pm} p + \sin \theta^{\pm} q) w(\theta) \} \\ &= \max_{\theta} \{ (p \cos \theta + q \sin \theta) w(\theta) \} \\ &=: H(p, q). \end{aligned}$$

□

By solving the Riemann problem for Hamilton-Jacobi Equations (a generalization of Godunov's procedure), Bardi and Osher [1] proved the following result for Godunov's scheme.

$$(6) \quad H^G(p_-, p_+; q_-, q_+) = \text{ext}_{p \in I[p_-, p_+]} \text{ext}_{q \in I[q_-, q_+]} H(p, q)$$

where

$$\text{ext}_{p \in I[a, b]} = \min_{p \in [a, b]} \quad \text{if } a \leq b,$$

$$\text{ext}_{p \in I[a, b]} = \max_{p \in [b, a]} \quad \text{if } a > b,$$

$$H^G(D_-^x \phi_{ij}, D_+^x \phi_{ij}; D_-^y \phi_{ij}, D_+^y \phi_{ij}) = H^G(p_-, p_+; q_-, q_+),$$

and  $I[a, b]$  denotes the closed interval bounded by  $a$  and  $b$ .

**Proposition 1.**  $\hat{H}$  is Godunov's numerical Hamiltonian; i.e.  $\hat{H} = H^G$ .

*Proof.* We first assume  $p_- < p_+$  and  $q_- < q_+$ .

$$\begin{aligned}
H^G(p_-, p_+; q_-, q_+) &:= \min_{p_- \leq p \leq p_+} \min_{q_- \leq q \leq q_+} H(p, q) \\
&= \min_{p_- \leq p \leq p_+} \min_{q_- \leq q \leq q_+} \{ \max_{\theta} \{ (p \cos \theta + q \sin \theta) w(\theta) \} \} \\
&= \max_{\theta} \{ \min_{p_- \leq p \leq p_+} \min_{q_- \leq q \leq q_+} (p \cos \theta + q \sin \theta) w(\theta) \} \\
&= \max_{\theta} \{ (\cos \theta^{\pm} p_{\mp} + \sin \theta^{\pm} q_{\mp}) w(\theta) \} \\
&=: \hat{H}(p_-, p_+; q_-, q_+)
\end{aligned}$$

The proof for the other 3 cases is equally straightforward.  $\square$

Now use our new numerical Hamiltonian to solve (2). In order to write our scheme in an explicit form, we prove the following property first.

**Lemma 3.**  $\max_{\theta} (af(\theta) - g(\theta)) = 0$  with  $f(\theta) > 0 \iff a = \min g(\theta)/f(\theta)$ .

*Proof.*

$$0 = \max_{\theta} (af(\theta) - g(\theta)) = \max_{\theta} f(\theta) \left( a - \frac{g(\theta)}{f(\theta)} \right)$$

Since  $f(\theta) > 0$ , we have  $0 = \max_{\theta} \left( a - \frac{g(\theta)}{f(\theta)} \right)$ , which implies  $0 = a - \min \frac{g(\theta)}{f(\theta)}$ .  $\square$

Apply this property to

$$\hat{H}(D_-^x \phi, D_+^x \phi; D_+^y \phi, D_-^y \phi) = R(x, y).$$

Let  $\phi_O = \phi_{i,j}$ ,  $\phi_W = \phi_{i-1,j}$ ,  $\phi_E = \phi_{i+1,j}$ ,  $\phi_S = \phi_{i,j-1}$ , and  $\phi_N = \phi_{i,j+1}$ . Breaking down the expressions, we have

$$\begin{aligned}
\max_{\theta, \phi_W, E, S, N} \left\{ \left\{ \begin{array}{l} \cos \theta^+ (\phi_O - \phi_W) \\ -\cos \theta^- (\phi_O - \phi_E) \end{array} \right\} + \left\{ \begin{array}{l} \sin \theta^+ (\phi_O - \phi_S) \\ -\sin \theta^- (\phi_O - \phi_N) \end{array} \right\} \right\} w(\theta) - hR(x_i, y_j) &= 0, \\
\max_{\theta, \phi_W, E, S, N} \phi_O (\cos \theta^+ - \cos \theta^- + \sin \theta^+ - \sin \theta^-) w(\theta) + & \\
\left\{ \begin{array}{l} -\cos \theta^+ \phi_W \\ \cos \theta^- \phi_E \end{array} \right\} + \left\{ \begin{array}{l} -\sin \theta^+ \phi_S \\ \sin \theta^- \phi_N \end{array} \right\} w(\theta) &= hR(x_i, y_j).
\end{aligned}$$

Thus

(7)

$$\phi_O = \min_{\theta} \left\{ \frac{\left\{ \begin{array}{l} \cos \theta^+ \phi_W + \sin \theta^+ \phi_S \\ -\cos \theta^- \phi_E - \sin \theta^- \phi_N \end{array} \right\} w(\theta) + hR(x_i, y_j)}{(|\cos \theta| + |\sin \theta|) w(\theta)} \right\} = \min_{\theta} K(\theta)$$

We can also derive the 3-D numerical Hamiltonian and the update formula in the same way. Let  $\phi_0 = \phi_{i,j,k}$ ,  $\phi_W = \phi_{i-1,j,k}$ ,  $\phi_E = \phi_{i+1,j,k}$ ,  $\phi_S = \phi_{i,j-1,k}$ ,  $\phi_N = \phi_{i,j+1,k}$ ,  $\phi_D = \phi_{i,j,k-1}$ , and  $\phi_U = \phi_{i,j,k+1}$ . We have

$$\begin{aligned}
\hat{H}(D_-^x \phi, D_+^x \phi; D_-^y \phi, D_+^y \phi; D_-^z \phi, D_+^z \phi) &= \\
\max_{\theta_1, \theta_2} \{ (\sin \theta_1 \cos \theta_2)^{\pm} D_{\mp}^x \phi + (\sin \theta_1 \sin \theta_2)^{\pm} D_{\mp}^y \phi + (\cos \theta_1)^{\pm} D_{\mp}^z \phi \} & w(\theta_1, \theta_2)
\end{aligned}$$

$$(8) \quad \phi_O = \min_{\theta_1, \theta_2} \left\{ \frac{\left\{ \begin{array}{l} (\sin \theta_1 \cos \theta_2)^+ \phi_W + (\sin \theta_1 \sin \theta_2)^+ \phi_S + (\cos \theta_1)^+ \phi_D \\ -(\sin \theta_1 \cos \theta_2)^- \phi_E - (\sin \theta_1 \sin \theta_2)^- \phi_N - (\cos \theta_1)^- \phi_U \end{array} \right\} w + hR}{(|\sin \theta_1 \cos \theta_2| + |\sin \theta_1 \sin \theta_2| + |\cos \theta_1|)w} \right\}$$

The minimization in the update formulas (7) and (8) can either be achieved analytically or numerically. For a Hamiltonian of quadratic form in the gradient, we solve the minimization analytically in the next section. For other cases, we find the minimizer by using some well-developed numerical optimization technique, e.g. L-BFGS-B [4] [28] and trust regions methods that employ quadratic interpolation [9] [7].

### 3. ANALYTICALLY SOLVING A CLASS OF HAMILTON JACOBI EQUATIONS

The quadratic form Hamiltonian

$$(9) \quad \sqrt{a(x, y)\phi_x^2 + b(x, y)\phi_y^2 - 2c(x, y)\phi_x\phi_y} = R(x, y)$$

is of special interest because computing geodesic distances on a manifold leads to this type of equation. Here we show that the minimization of (7) can be solved explicitly. Using the Legendre transformation, we have (after some simple calculations):

$$H(\cos \nu, \sin \nu) = \sqrt{a \cos^2 \nu + b \sin^2 \nu - 2c \sin \nu \cos \nu}$$

and

$$w(\theta) = \sqrt{\frac{ab - c^2}{a \sin^2 \theta + b \cos^2 \theta + 2c \cos \theta \sin \theta}}$$

Finding the minimum of (7) when  $0 < \theta < \pi/2$  first.  $\frac{dK}{d\theta} = 0$  leads to

$$(10) \quad (-\phi_W + \phi_S)w^2 - hR[(\cos \theta + \sin \theta)w' + (-\sin \theta + \cos \theta)w] = 0$$

Thus

$$(11) \quad \frac{-\phi_W + \phi_S}{hR} = \frac{-a \sin \theta + b \cos \theta + c(\sin \theta - \cos \theta)}{\sqrt{(ab - c^2)(a \sin^2 \theta + b \cos^2 \theta + 2c \sin \theta \cos \theta)}} = T(\theta)$$

and

$$T'(\theta) = -\frac{(ab - c^2)(\cos \theta + \sin \theta)}{(a \sin^2 \theta + b \cos^2 \theta + 2c \sin \theta \cos \theta)^{3/2}} < 0$$

The solvability condition for  $\theta_1$  is

$$(12) \quad \frac{c - a}{\sqrt{a(ab - c^2)}} < \frac{-\phi_W + \phi_S}{hR} < \frac{b - c}{\sqrt{b(ab - c^2)}}$$

If (12) is satisfied, we will have a unique solution for  $0 < \theta < \pi/2$  because of the monotonicity of  $T$ . Let  $m = (-\phi_W + \phi_S)/hR$ . We have

$$\theta = \tan^{-1} \left( \frac{-cm^2(ab - c^2) - (a - c)(b - c) \pm m(ab - c^2)\sqrt{m^2(ab - c^2) - (a + b - 2c)}}{am^2(ab - c^2) - (a - c)^2} \right)$$

if  $m$  and denominator are not zero. Here we have two choices for  $\theta$  because we square both sides while we do the calculation. We need to plug in (11) and pick up the right one. Also

$$\theta = \tan^{-1}\left(\frac{b-a}{c-a}\right)$$

if denominator is zero, and

$$\theta = \tan^{-1}\left(\frac{c-b}{c-a}\right)$$

if  $m = 0$ . Using similar arguments, we can write down solvability conditions and explicit formulas for  $\theta$  in other ranges. This can be summarized in the following algorithm.

**Algorithm:** (Quadratic Hamilton Jacobi Solver using the Bellman formula) We assume that  $\phi(i, j)$  is given in a small neighborhood of  $\Gamma$ . We initialize unknown  $\phi$  by setting  $\phi(i, j)$  to  $\infty^1$  and  $\text{mask}(i, j) = \text{unknown}$ .

We begin by setting  $\phi^{(0)} = \phi$ .

Do the following steps while  $\|\phi^{(n+1)} - \phi^{(n)}\| > \delta$ : ( $\delta > 0$  is the given tolerance which is  $O(h)$ .)

**Sweeping Process:** A compact way of writing this sweeping iterations in C/C++ is:

```
for (s1=-1; s1<=1; s1+=2)
for (s2=-1; s2<=1; s2+=2)
for (i=(s1<0?nx:0); (s1<0?i>=0:i<=nx); i+=s1)
for (j=(s2<0?ny:0); (s2<0?j>=0:j<=ny); j+=s2)
    update  $\phi_{i,j}$ 
```

**Update Formula:** For each grid point  $(i, j)$  visited in the sweeping iteration, if  $\text{mask}(i, j) = \text{unknown}$ , do the following:

For  $(s_x, s_y) = (\pm 1, \pm 1)$

1. Check the solvability condition

$$m = \frac{s_x s_y (\phi^{(n)}(i, j - s_y) - \phi^{(n)}(i - s_x, j))}{hR}$$

$$\text{check } \frac{c-a}{\sqrt{a(ab-c^2)}} < m < \frac{b-c}{\sqrt{b(ab-c^2)}} \quad \text{when } s_x s_y > 0$$

$$\text{check } \frac{-(b+c)}{\sqrt{b(ab-c^2)}} < m < \frac{a+c}{\sqrt{a(ab-c^2)}} \quad \text{when } s_x s_y < 0$$

2. If the condition is satisfied,

$$\theta = \tan^{-1} \left( \frac{-cm^2(ab-c^2) - (as_x - cs_y)(bs_y - cs_x)}{am^2(ab-c^2) - (as_x - cs_y)^2} \pm \frac{m(ab-c^2)\sqrt{m^2(ab-c^2) - (a+b-2cs_x s_y)}}{am^2(ab-c^2) - (as_x - cs_y)^2} \right) + (1 - s_x) \frac{\pi}{2}$$

if both  $m$  and the denominator are not zero. Plug in the test function

$$T(\theta) = \frac{\sin \theta(-as_x + cs_y) + \cos \theta(bs_y - cs_x)}{\sqrt{(ab-c^2)(a \sin^2 \theta + b \cos^2 \theta + 2c \sin \theta \cos \theta)}}$$

<sup>1</sup>Notice that we only need to use a large value in actual implementation.

and pick up the right one which equals  $m$ , not  $-m$ . Also

$$\theta = \tan^{-1} \left( \frac{b - a}{c - a s_x s_y} \right)$$

if denominator is zero, and

$$\theta = \tan^{-1} \left( \frac{c s_x - b s_y}{c s_y - a s_x} \right)$$

if  $m = 0$ .

3. Add

$$\phi_{tmp} = \frac{(s_x \cos \theta \phi(i - s_x, j) + s_y \sin \theta \phi(i, j - s_y)) w(\theta) + h R}{(|\cos \theta| + |\sin \theta|) w(\theta)}$$

to the list `phi_candidate`.

4. Add  $K(0)$ ,  $K(\frac{\pi}{2})$ ,  $K(\pi)$ ,  $K(\frac{3\pi}{2})$  to the list `phi_candidate`.

5. Let  $\phi_{min}$  be the minimum element of `phi_candidate`.

6. Update

$$\phi^{(n+1)}(i, j) = \min(\phi^{(n)}(i, j), \phi_{min}).$$

#### 4. NUMERICAL MINIMIZATION

For more general sweeping algorithm, we use numerical optimization to calculate  $\phi_0$ . There are a lot of different type of minimization methods. Some methods need only evaluations of the function while other methods also require evaluations of the derivative of the function. Each method has its advantages and disadvantages. For our multidimensional cases, we use the L-BFGS-B method [4] [28] [5] because the cost of the iteration is low and the storage requirements of the algorithm are modest. L-BFGS-B is a limited memory quasi-Newton method for large-scale bound-constrained problem. Consider finding a minimum by Newton's method to search for a zero of the gradient of the function  $f(\theta) : R^n \rightarrow R$ . The iteration formula is given by:

$$\theta^{K+1} = \theta^k - A^{-1} \cdot \nabla f(\theta)$$

where  $A$  is the Hessian matrix of  $f$ . BFGS method is a "quasi"-Newton method because it doesn't use the actual Hessian matrix of  $f$ , but it constructs a sequence of  $H^k$  to approximate  $A^{-1}$ . The iteration formula for unconstrained optimization is given by

$$\theta^{k+1} = \theta^k - \lambda^k H^k g^k \quad k = 0, 1, 2, \dots$$

where  $\lambda^k$  is a step size,  $g^k$  is the gradient of  $f$  at  $\theta^k$ , and  $H^k$  is updated at every iteration by the following formula

$$(13) \quad H^{k+1} = (V^k)^T H^k V^k + \rho^k s^k (s^k)^T,$$

where

$$\rho^k = 1/(y^k)^T s^k, \quad V^k = I - \rho^k y^k (s^k)^T,$$

and

$$s^k = \theta^{k+1} - \theta^k, \quad y^k = g^{k+1} - g^k.$$

The limited memory BFGS method only stores the  $m$  most recent pairs  $\{s^i, y^i\}_{i=k-m}^{k-1}$  to update  $H^k$ . Suppose that the current iteration is  $\theta^k$  and the initial limited memory matrix



$H_{(0)}^k$  (usually a diagonal matrix) is updated by  $\{s^i, y^i\}_{i=k-m}^{k-1}$ . From (13) we have

$$(14) \quad \begin{aligned} H^k = & ((V^{k-1})^T \dots (V^{k-m})^T) H_{(0)}^k (V^{k-m} \dots V^{k-1}) \\ & + \rho^{k-m} ((V^{k-1})^T \dots (V^{k-m+1})^T) s^{k-m} (s^{k-m})^T (V^{k-m+1} \dots V^{k-1}) \\ & + \rho^{k-m+1} ((V^{k-1})^T \dots (V^{k-m+2})^T) s^{k-m+1} (s^{k-m+1})^T (V^{k-m+2} \dots V^{k-1}) \\ & + \dots \\ & + \rho^{k-1} s^{k-1} (s^{k-1})^T \end{aligned}$$

For bound constrained problems, the direct Hessian approximation  $B^k = (H^k)^{-1}$  is used. The detail derivation and efficient algorithm for computing  $H^k$  and  $B^k$  are in [5]. This  $B^k$  is used to define a quadratic model of  $f$  at  $\theta^k$ ,

$$Q^k(\theta) = f(\theta^k) + (g^k)^T(\theta - \theta^k) + \frac{1}{2}(\theta - \theta^k)^T B^k(\theta - \theta^k).$$

In order to find the minimizer of  $Q^k$  subject to the bound constrained, the gradient projection method is first used to determine a set of active bounds. Suppose we have  $\Theta = \{\theta | l_i \leq \theta_i \leq u_i, i = 1, \dots, n\}$ , the  $i$ th coordinate of the projection of vector  $\theta$  is given by

$$P(\theta, l, u)_i = \begin{cases} l_i & \text{if } \theta_i \leq l_i \\ u_i & \text{if } \theta_i \geq u_i \\ \theta_i & \text{otherwise} \end{cases}$$

We find the generalized Cauchy point which is the first local minimizer  $\theta^c$  of

$$Q_L^k(t) = Q^k(P(\theta^k - tg^k, l, u))$$

Use  $\theta^c$  to identify a set of active variable and then find the minimizer  $\bar{\theta}^{k+1}$  of the quadratic model with respect to the free variables. Perform a line search

$$(15) \quad \theta^{k+1} = \theta^k + \alpha^k (\bar{\theta}^{k+1} - \theta^k)$$

where  $\alpha^k$  is the step size, to find  $\theta^{k+1}$  which satisfies the sufficient decrease condition

$$f(\theta^{k+1}) \leq f(\theta^k) + 10^{-4} (g^k)^T (\bar{\theta}^{k+1} - \theta^k).$$

For more details, please refer to [4]. In our calculation, we choose  $m = 5$  and the stopping criterion is

$$\|P(\theta^k - g^k, l, u) - \theta^k\|_\infty < 10^{-6}.$$

## 5. EXAMPLES

We implement our new numerical scheme in the following examples. We choose  $\delta = 10^{-15}$  for 2 dimensional cases and  $\delta = 10^{-12}$  for 3 dimensional cases for simplicity. Ideally the  $\delta$  should be chosen as a small constant times the grid size. We test an anisotropic case with constant coefficients  $a, b$ , and  $c$  in Figure 1. Figure 2 shows a very degenerate case with varied coefficients and a box-shape boundary condition. Figure 3 and Figure 4 show the geodesic distances on manifolds. Figure 5 is an example of the first arrival travel times to seismic imaging. Figure 6 and Figure 7 are the solutions for 3 dimensional eikonal equation with one point and two points boundary conditions. Figure 8 is the more general case for 3 dimensions. This seems to be the first successful rapid computation in 3 dimensions for such problems. In [27], it was proved that the results from the fast sweeping method for the eikonal equation with  $R(x) = 1$  needs only one iteration, which is exactly  $2^n$  Gauss-Seidel alternating sweepings for the problem in  $R^n$ , to reach a solution with global error  $O(h \log(1/h))$ . We provide the numerical evidence by testing our methods on eikonal equation with  $R(x) = 1$  on two and three dimensions. The results are given

2D eikonal equation $dx=$	2/50	2/100	2/200
$L_1$ error	0.102158	0.060888	0.0358203
$L_\infty$ error	0.0437414	0.0262969	0.0154506
	2/400	2/800	2/1600
	0.0207759	0.0118848	0.0067128
	0.00890583	0.00505242	0.00282877
			1/3200
			0.00374894
			0.00156648

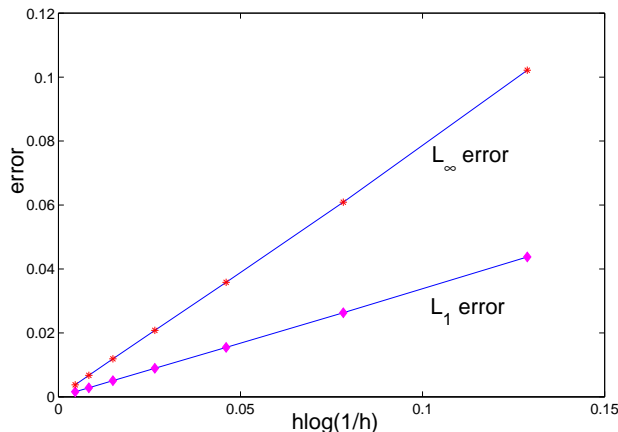


TABLE 1. the errors of 2D eikonal case

in table 1 and table 2. For anisotropic cases, we found out that the number of iterations depend on the anisotropy of Hamiltonian, but it is always reasonable and appears to be independent of the grid size.

## 6. CONCLUSION

In this paper, we have presented a new numerical method for Hamilton Jacobi equations written in the form of Bellman's formula. We proved that the numerical Hamiltonian we proposed is monotone, consistent, and is in fact, also the Godunov Hamiltonian. We implemented this new scheme and showed some results in two and three dimensional cases.

## REFERENCES

- [1] M. Bardi and S. Osher. The nonconvex multi-dimensional Riemann problem for Hamilton-Jacobi equations. *SIAM J Math Anal*, 22(2):344–351, 1991.
- [2] Timothy J. Barth. On the marchability of interior stabilized discontinuous galerkin approximations of the eikonal and related pdes with non-divergence structure. *NASA Technical Report, NAS-01-010, NASA Ames Research Center*, 2001.
- [3] M. Boué and P. Dupuis. Markov chain approximations for deterministic control problems with affine dynamics and quadratic cost in the control. *SIAM J Num Anal*, 36(3):667–695, 1999.
- [4] R. H. Byrd, P. Lu, J. Nocedal, and C. Zhu. A limited memory algorithm for bound constrained optimization. *SIAM J. Scientific Computing*, 16(5):1190–1208, 1995.
- [5] R. H. Byrd, J. Nocedal, and R. B. Schnabel. Representation of quasi-newton matrices and their use in limited memory methods. *Mathematical Programming*, 63(4):129–156, 1994.
- [6] Li-Tien Cheng, P. Burchard, B. Merriman, and S. Osher. Motion of curves constrained on surfaces using a level set approach. *J. Comput. Phys.*, 175:604–644, 2002.
- [7] T. F. Coleman and Y. Li. An interior, trust region approach for nonlinear minimization subject to bounds. (*SIAM Journal on Optimization*), 6(2):418–445, 1996.

3D eikonal equation $dx=$	2/50	2/64	2/100
$L_1$ error	0.399696	0.330305	0.233834
$L_\infty$ error	0.0761747	0.0635267	0.0454065
	2/128	2/200	2/256
	0.192961	0.135946	0.111793
	0.0375639	0.0264938	0.0217706
			2/300
			0.0985156
			0.0191687

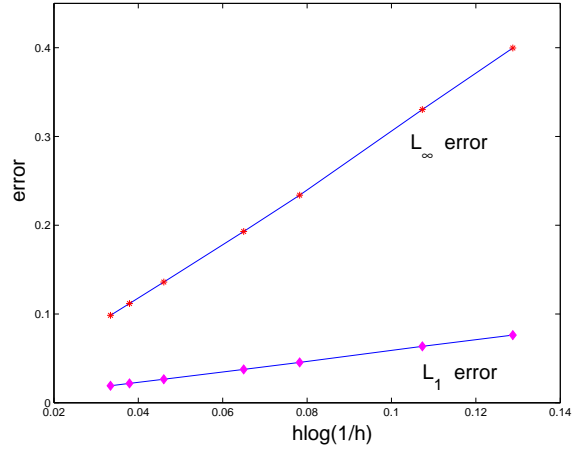


TABLE 2. the errors of 3D eikonal case

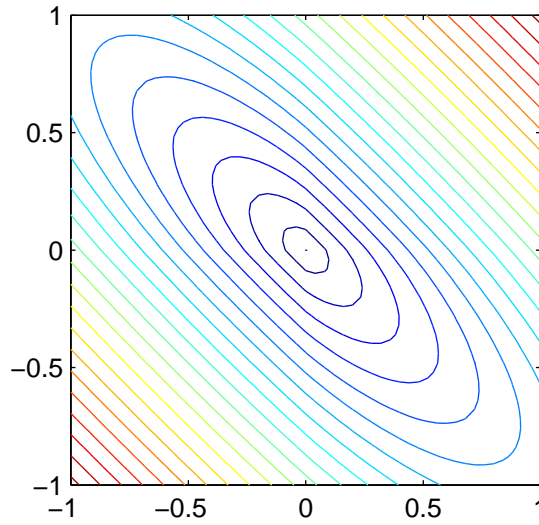


FIGURE 1. A sweeping result after 2 sweeping iterations on a 50x50 grid. The boundary is a single point in the center.  $a = 1.0$ ,  $b = 1.0$ ,  $c = 0.9$  and  $R = 1$ .

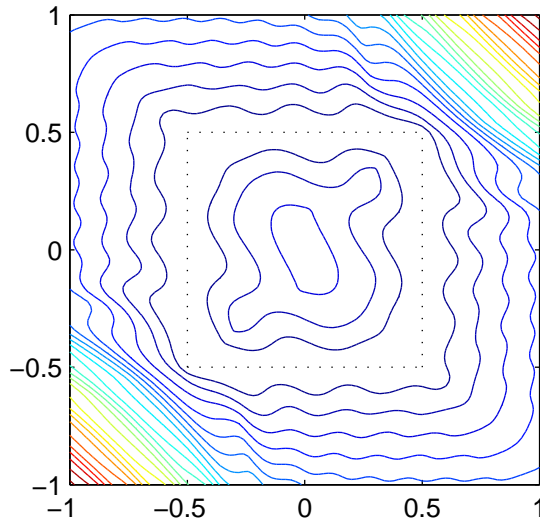


FIGURE 2. (A very degenerate case)  $a = 0.375$ ,  $b = 0.25$ ,  $c = 0.29$ , and  $R(x, y) = (2.1 - \cos(4\pi^2 xy))/4.0$  on a  $100 \times 100$  grid. Notice that in this case,  $ab = 0.0938$  is barely greater than  $c^2 = 0.0841$ . Convergence is reached after 45 sweeping iterations.

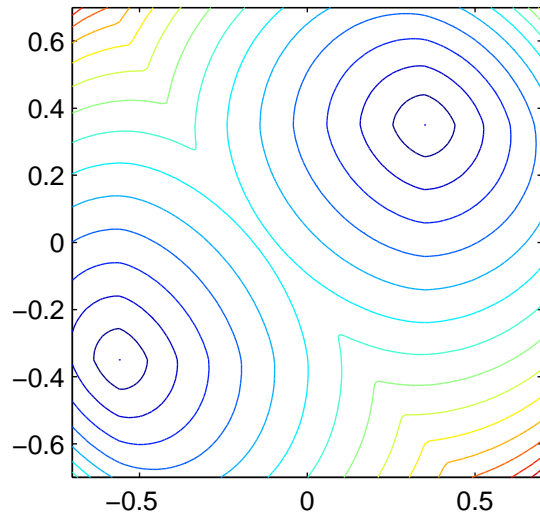


FIGURE 3. This is an example of the distance on a half sphere. The sweeping algorithm applied to the graph of  $f(x, y) = \sqrt{1.0 - (x^2 + y^2)}$  with  $\phi(-0.56, -0.35) = \phi(0.35, 0.35) = 0$  as boundary condition on a  $100 \times 100$  grid. The convergence was reached after 3 sweeping iterations.

- [8] M. G. Crandall and P. L. Lions. Two approximations of solutions of Hamilton-Jacobi equations. *Mathematics of Computation*, 43:1–19, 1984.
- [9] A. Friedlander, J. M. Martinez, and S. A. Santos. A new trust region algorithm for bound constrained minimization. *Appl. Math. Optim.*, 30:235–266, 1994.

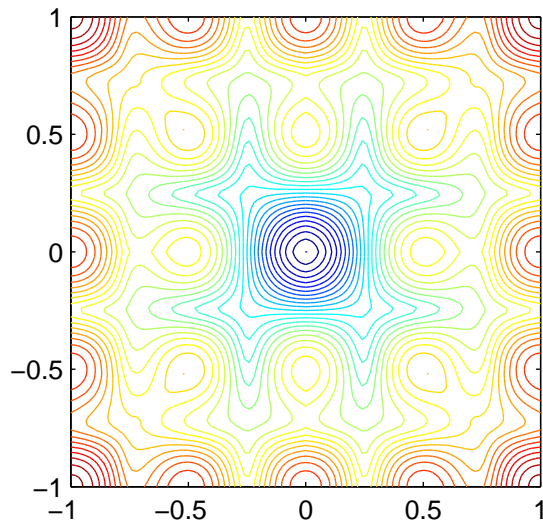


FIGURE 4. The distance contour from  $(0, 0)$  on the graph of  $f(x, y) = \cos(2\pi x) \cos(2\pi y)$ . The convergence was obtained after 12 iterations on  $100 \times 100$  grid.

- [10] S. Gray and W. May. Kirchhoff migration using eikonal equation traveltimes. *Geophysics*, 59(5):810–817, 1994.
- [11] J. Helmsen, E. Puckett, P. Colella, and M. Dorr. Two new methods for simulating photolithography development in 3d. In *SPIE 2726*, pages 253–261, 1996.
- [12] Guang-Shan Jiang and Danping Peng. Weighted ENO schemes for Hamilton-Jacobi equations. *SIAM J. Sci. Comput.*, 21(6):2126–2143 (electronic), 2000.
- [13] R. Kimmel and J. A. Sethian. Computing geodesic paths on manifolds. *Proc. Natl. Acad. Sci. USA*, 95(15):8431–8435 (electronic), 1998.
- [14] Facundo Memoli and Guillermo Sapiro. Fast computation of weighted distance functions and geodesics on implicit hyper-surfaces. *Journal of computational Physics*, 173(6):730–764, 2001.
- [15] S. Osher. A level set formulation for the solution of the Dirichlet problem for Hamilton-Jacobi equations. *SIAM J Math Anal*, 24(5):1145–1152, 1993.
- [16] S. Osher and Chi-Wang Shu. High-order essentially nonoscillatory schemes for Hamilton-Jacobi equations. *SIAM J. Numer. Anal.*, 28(4):907–922, 1991.
- [17] Stanley Osher and James A. Sethian. Fronts propagating with curvature-dependent speed: algorithms based on Hamilton-Jacobi formulations. *J. Comput. Phys.*, 79(1):12–49, 1988.
- [18] Danping Peng, Stanley Osher, Barry Merriman, and Hong-Kai Zhao. The geometry of Wulff crystal shapes and its relations with Riemann problems. In *Nonlinear partial differential equations (Evanston, IL, 1998)*, pages 251–303. Amer. Math. Soc., Providence, RI, 1999.
- [19] J. Qian and W. W. Symes. Paraxial eikonal solvers for anisotropic quasi-p travel times. *J. Comp. Phys.*, 174(1):256–278, 2001.
- [20] J. Qian and W. W. Symes. Finite-difference quasi-p traveltimes for anisotropic media. *Geophysics*, 67:147–155, 2002.
- [21] E. Rouy and A. Tourin. A viscosity solutions approach to shape-from-shading. *SIAM J Num Anal*, 29(3):867–884, 1992.
- [22] J. A. Sethian. Fast marching level set methods for three dimensional photolithography development. In *SPIE 2726*, pages 261–272, 1996.
- [23] J. A. Sethian and A. Vladimirsky. Ordered upwind methods for static Hamilton-Jacobi equations. *Proc. Natl. Acad. Sci. USA*, 98(20):11069–11074 (electronic), 2001.
- [24] Panagiotis E. Souganidis. Approximation schemes for viscosity solutions of Hamilton-Jacobi equations. *J. Differential Equations*, 59(1):1–43, 1985.

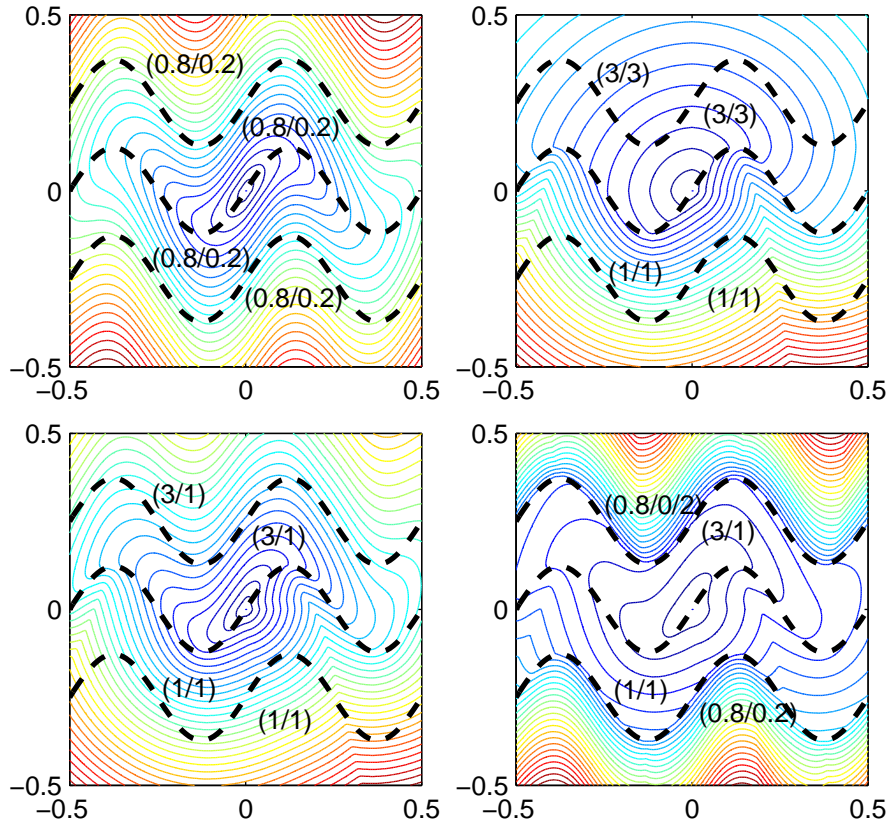


FIGURE 5. This is an example of first arrival travel times in seismic imaging [23]. The computational domain suggests material layering under a sinusoidal profile with layer shapes  $C(x) = 0.1225 \sin(4\pi x)$ . Suppose the domain is split into four parts by  $y_i(x) = 0.1225 \sin(4\pi x) + p_i$  where  $i = 1, 2, 3$  and  $p_i = (-0.25, 0, 0.25)$ . In each layer, the anisotropic speed at  $(x, y)$  is given by an ellipse with long axis (of length  $2F_2$ ) tangential to the curve  $C(x)$  and the short axis (of length  $2F_1$ ) normal to the curve.  $F_1$  and  $F_2$  are constants in each layer. This leads to  $F_2 \sqrt{((1+n^2)\phi_x^2 + (1+m^2)\phi_y^2 - 2mn\phi_x\phi_y)/(1+m^2+n^2)} = 1$  where  $(m, n) = \frac{\sqrt{(F_2/F_1)^2 - 1}}{\sqrt{1 + (\frac{dC(x)}{dx})^2}} (\frac{dC(x)}{dx}, -1)$ . The  $(F_2, F_1)$  pair for each layer is given in the above figures. The convergence was obtained after 5, 4, 16, and 16 iterations on 200x200 grid.

- [25] Yen-Hsi Richard Tsai, Li-Tien Cheng, Stanley Osher, and Hong-Kai Zhao. Fast sweeping methods for a class of Hamilton-Jacobi equations. *UCLA CAM Report*, 01(27), 2001. To appear, SINUM.
- [26] J. Tsitsiklis. Efficient algorithms for globally optimal trajectories. *IEEE Transactions on Automatic Control*, 40(9):1528–1538, 1995.
- [27] Hong-Kai Zhao. Fast sweeping method for eikonal equations I: Distance function. [www.math.uci.edu/~zhao](http://www.math.uci.edu/~zhao), 2002. Under review, SINUM.
- [28] C. Zhu, R. H. Byrd, P. Lu, and J. Nocedal. L-bfgs-b: Fortran subroutines for large scale bound constrained optimization. *ACM Trans. Math. Software*, 23(4):550–560, 1997.

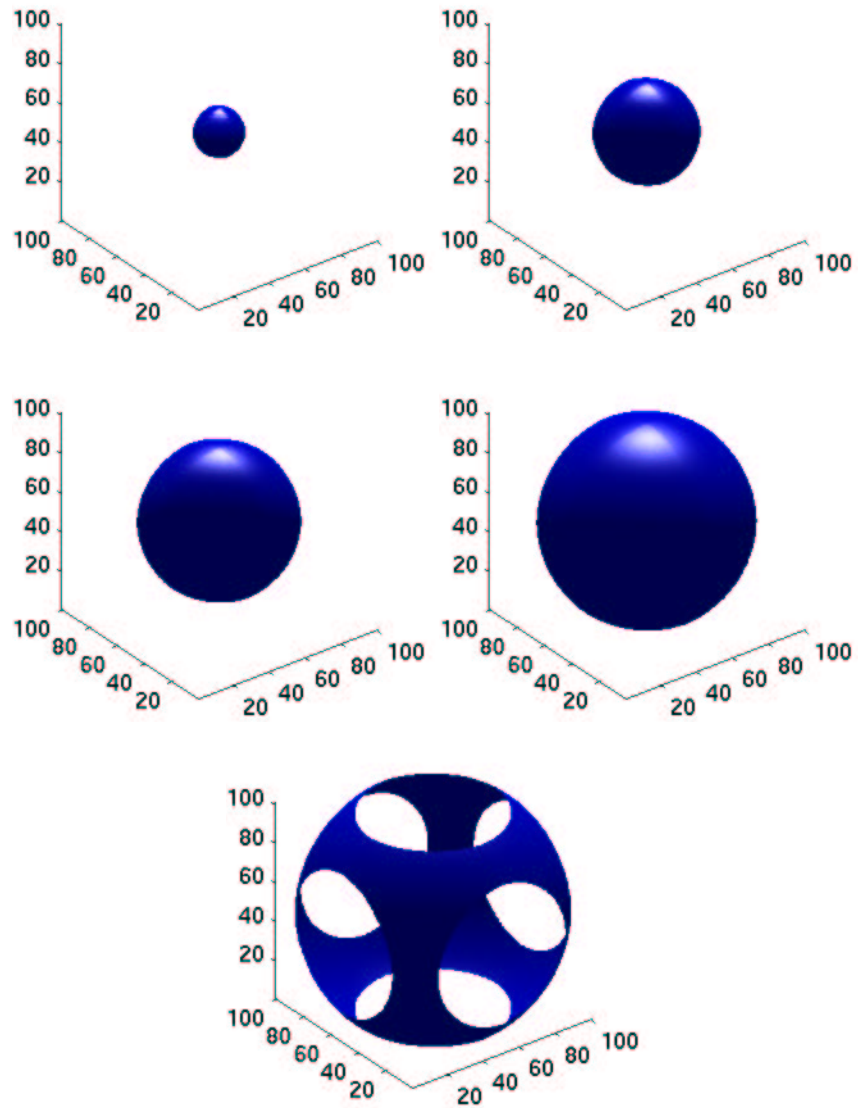


FIGURE 6. This is one-iteration result of the 3D eikonal equation with the boundary  $(0, 0)$  in the center of the graph. The corresponding contours are 0.25, 0.5, 0.75, 1.0, 1.25.

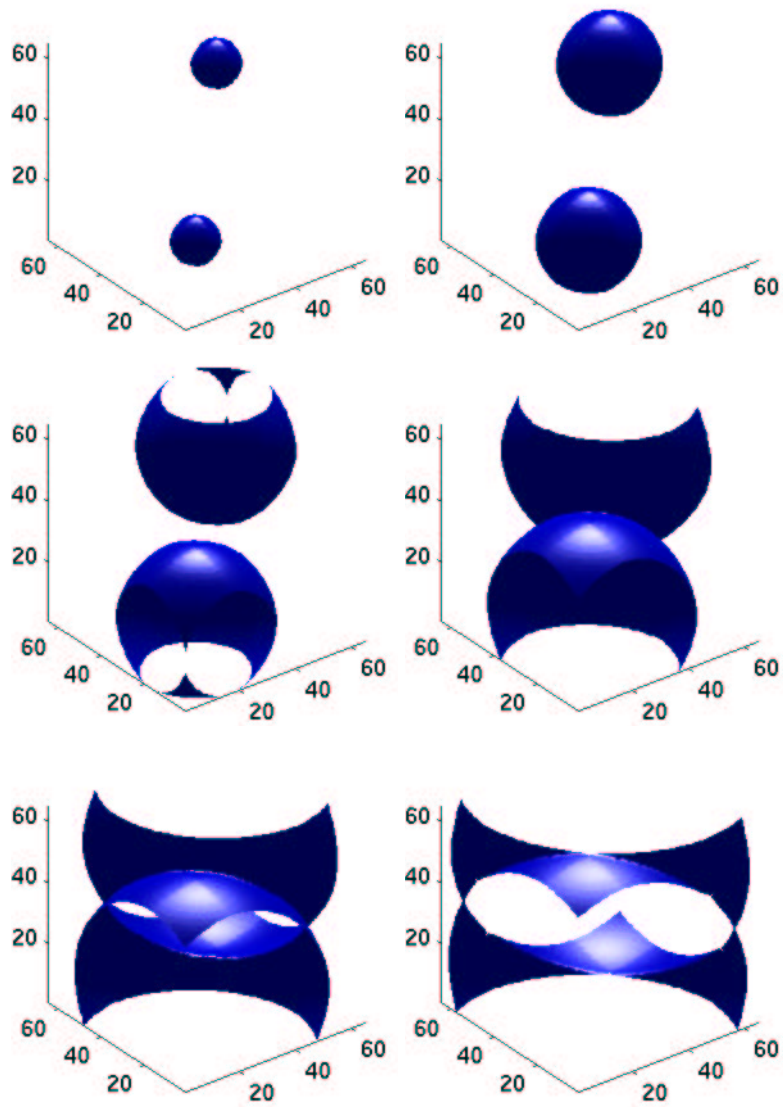


FIGURE 7. This is one-iteration result of the 3D eikonal equation with two boundary points  $(-0.5, -0.5)$  and  $(0.5, 0.5)$ . The corresponding contours are 0.25, 0.5, 0.75, 1, 1.25, 1.5.



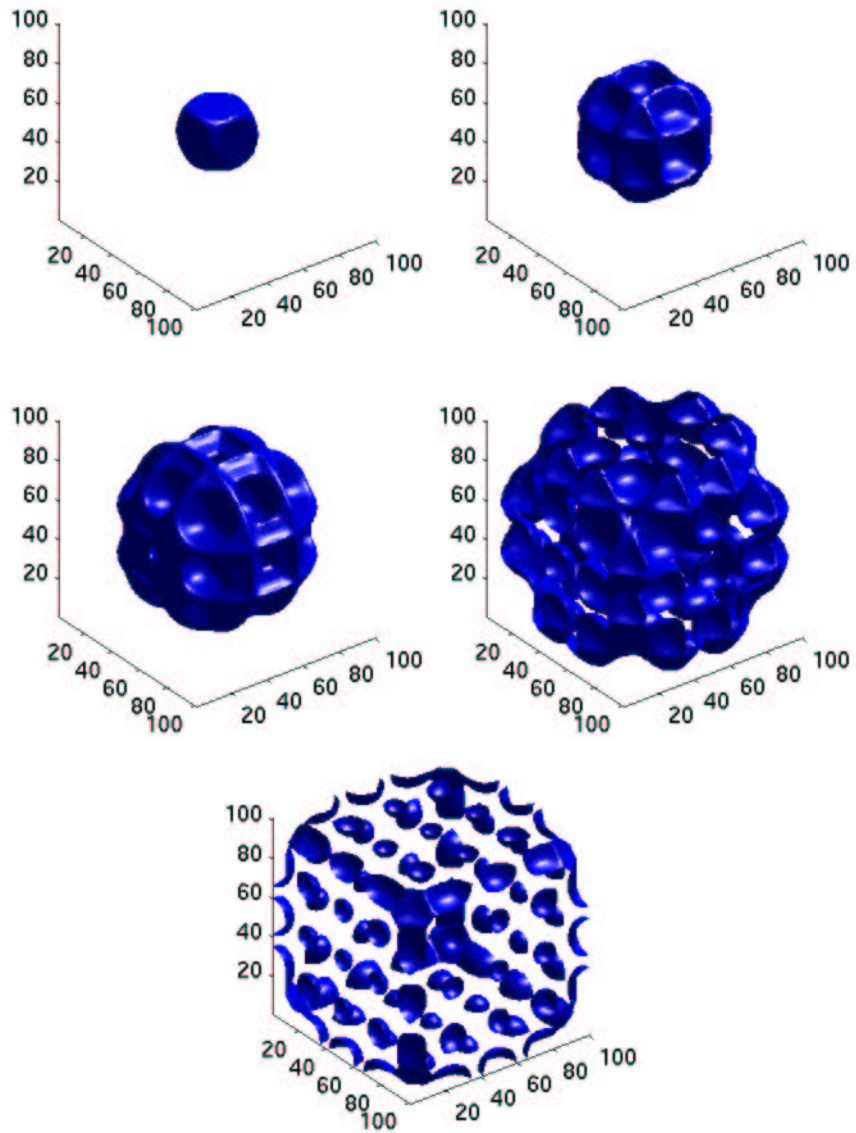


FIGURE 8. This is a 3d example with  $f(x, y, z) = \cos(2\pi x) \cos(2\pi y) \cos(2\pi z)$  and the corresponding  $w = (1 + \nabla f \cdot \theta)^{-1/2}$ . The convergence was obtained after 10 iterations on 100x100x100 grid. The contours shown here are 1.2, 1.5, 1.8, 2.2, 2.5.